

CURVE INOX
STAINLESS STEEL BENDS
CX



Caratteristiche tecniche - Technical specifications

Modello Model	Diametro Diameter	α°	Raggio/Radius				
			R = 200	R = 400	R = 600	R = 800	R = 1000
CX 40	40	45	●	●			
CX 50	50	45	●	●	○		
CX 60	60	45		●	○		
CX 70	70	45		●			
CX 40	40	90	●	●	○		
CX 50	50	90	●	●	○		
CX 60	60	90		●	○		
CX 70	70	90		●	○		
CX 80	80	90			○	●	
CX 90	90	90				○	
CX 100	100	90					○
CX 114	114	90					○


● = Disponibile in magazzino/In stock

○ = Su richiesta/On request



Listening

CURVE INOX STAINLESS STEEL BENDS CX

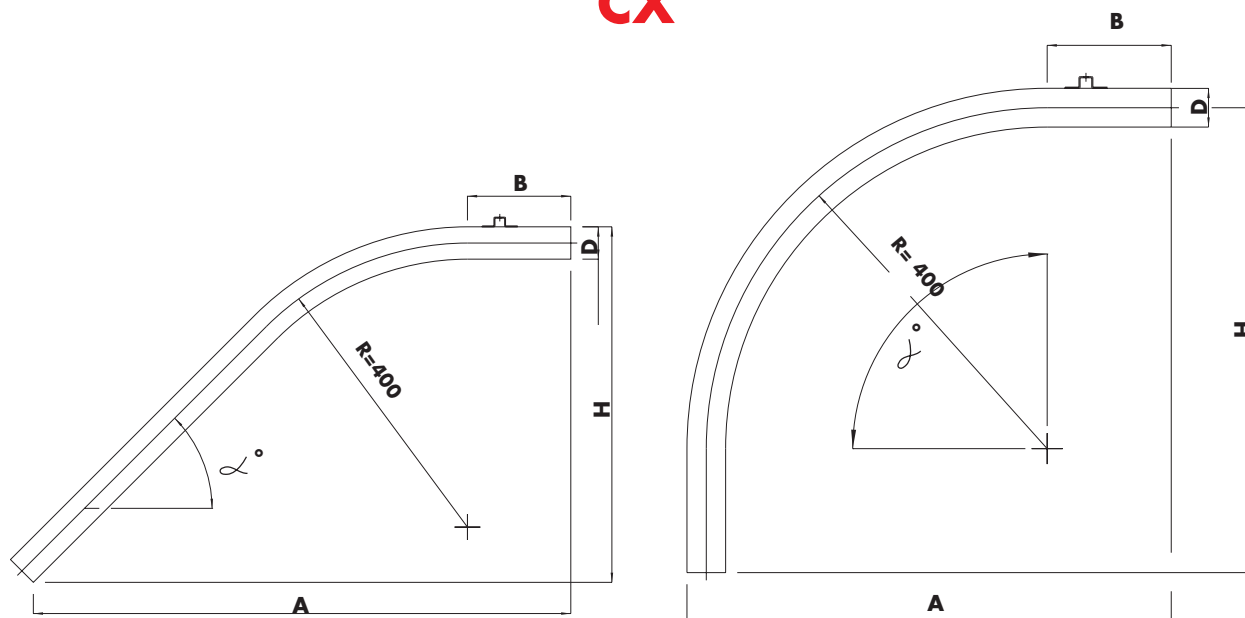

Caratteristiche tecniche - Technical specifications


Modello Model	D mm	Raggio Radius	α °	A mm	B mm	H mm	Peso/Weight kg
CX 40245	40	200	45	366	140	192	0.6
CX 40445	40	400	45	798	150	530	1.4
CX 50245	50	200	45	653	150	480	1.7
CX 50445	50	400	45	794	150	593	1.7
CX 50645	50	600	45	838	150	500	2
CX 60445	60	400	45	790	150	547	2.5
CX 60645	60	600	45	942	285	595	2.2
CX 70445	70	400	45	1027	140	495	3
CX 40290	40	200	90	360	160	340	0.9
CX 40490	40	400	90	625	250	605	1.4
CX 40690	40	600	90	870	140	850	2.2
CX 50290	50	200	90	365	160	340	1
CX 50490	50	400	90	625	240	600	1.9
CX 50690	50	600	90	915	160	890	2.7
CX 60490	60	400	90	615	240	585	2
CX 60690	60	600	90	920	120	890	2.9
CX 70490	70	400	90	555	120	520	2.5
CX 70690	70	600	90	755	120	720	4
CX 80690	80	600	90	760	120	720	5.2
CX 80890	80	800	90	960	120	920	6.3
CX 90890	90	800	90	965	120	920	7
CX 1001090	100	1000	90	1170	120	1120	8.5

Con riserva di modifica/Modification reserved

Stampato/Printed: 20/01/04

cod. 6.98.711.3

= Su richiesta/On request



CURVE CERAMICATE CERAMIC COATED BENDS CC



Caratteristiche tecniche - Technical specifications

Modello Model	Diametro Diameter	α°	Raggio/Radius		
			R = 200	R = 400	R = 600
CC 40	40	45	●	●	○
CC 50	50	45	●	●	○
CC 60	60	45		●	○
CC 40	40	90	●	●	○
CC 50	50	90	●	●	○
CC 60	60	90		●	○
CC 70	70	90		●	○


● = Disponibile in magazzino/In stock

○ = Su richiesta/On request



Listening


CURVE CERAMICATE CERAMIC COATED BENDS CC

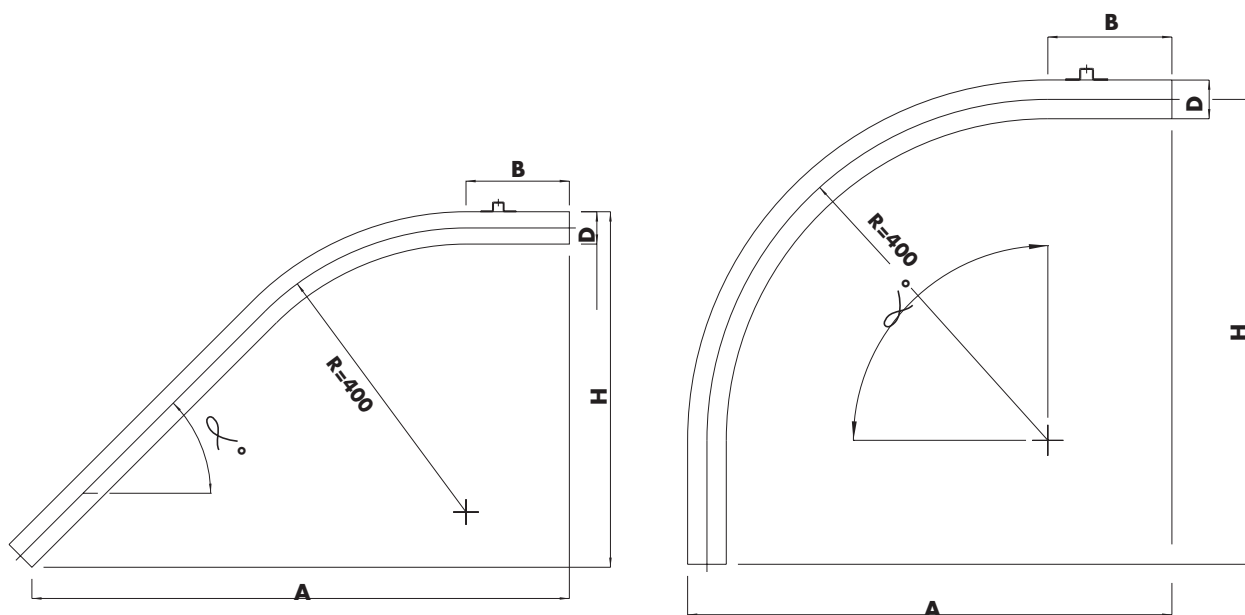


Dimensioni - Dimensions

Modello Model	D mm	Raggio Radius	φ°	A mm	B mm	H mm	Peso/Weight kg
CC 40245	40	200	45	636	160	441	0.9
CC 40445	40	400	45	805	160	512	1.5
CC 50245	50	200	45	663	160	480	0.95
CC 50445	50	400	45	832	160	550	1.7
CC 50645	50	600	45	683	160	333	1.4
CC 60645	60	400	45	800	160	530	2.5
CC 40290	40	200	90	360	140	340	0.95
CC 40490	40	400	90	620	160	600	1.6
CC 40690	40	600	90	745	250	725	1.6
CC 50290	50	200	90	365	140	340	1.2
CC 50490	50	400	90	625	160	600	0.85
CC 50690	50	600	90	915	240	890	2.7
CC 60490	60	400	90	615	160	585	2.2
CC 70490	70	400	90	595	160	560	2.7

= Su richiesta/On request



CURVE INOX LUNGHE
LONG STAINLESS STEEL BENDS
CXL

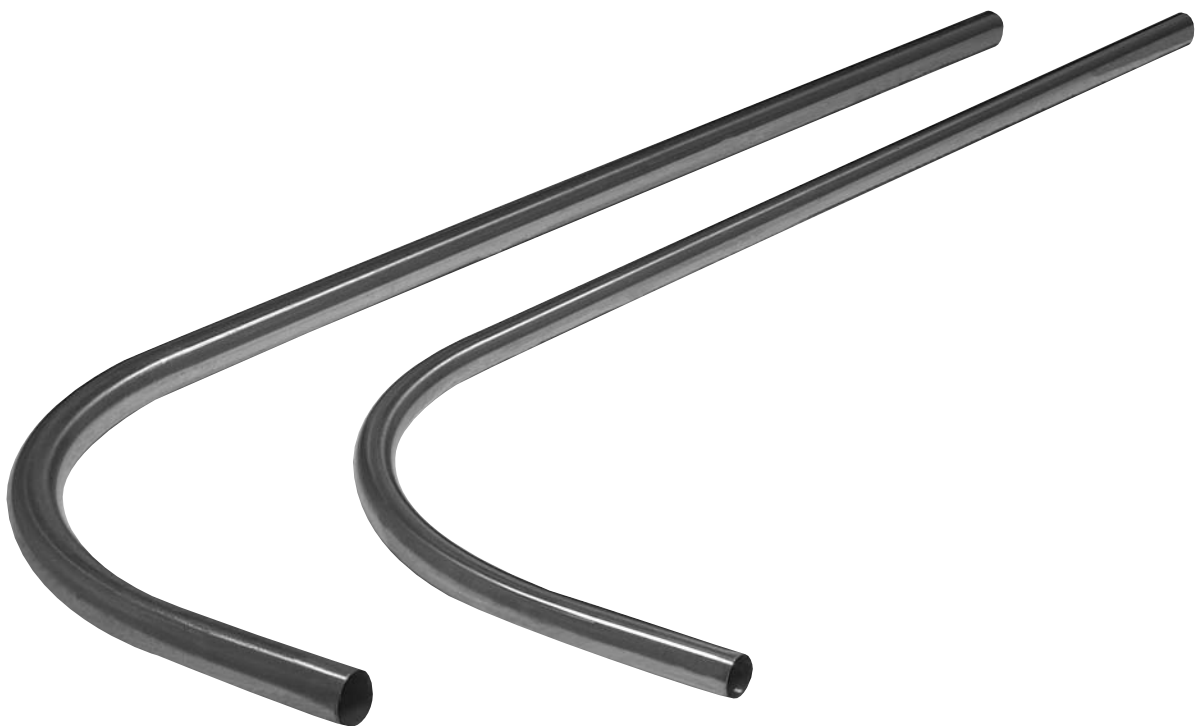


Caratteristiche tecniche - Technical specifications

Modello Model	Raggio/Radius					
	d	200	400	600	800	1000
CXL 40	40	-	•	-	-	-
CXL 50	50	-	•	-	-	-
CXL 60	60	-	•	-	-	-



Listening

CURVE INOX LUNGHE LONG STAINLESS STEEL BENDS CXL

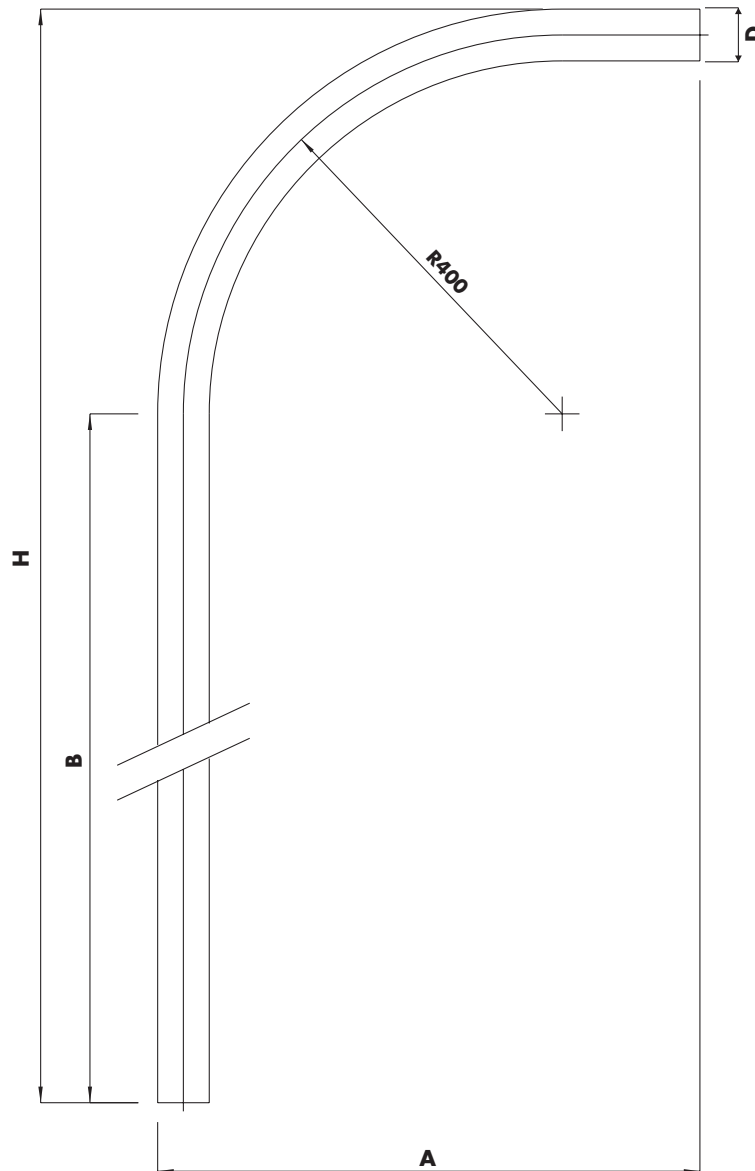

Dimensioni - Dimensions

Modello Model	D mm	Raggio Radius	α°	A mm	B mm	H mm	Peso/Weight kg
CXL 40490	40	400	90	625	2000	2465	3.5
CXL 50490	50	400	90	625	2000	2465	5
CXL 60490	60	400	90	630	2000	2465	6.3