




VENTURI FEEDERS **VTM - VTP - SV**



VTM

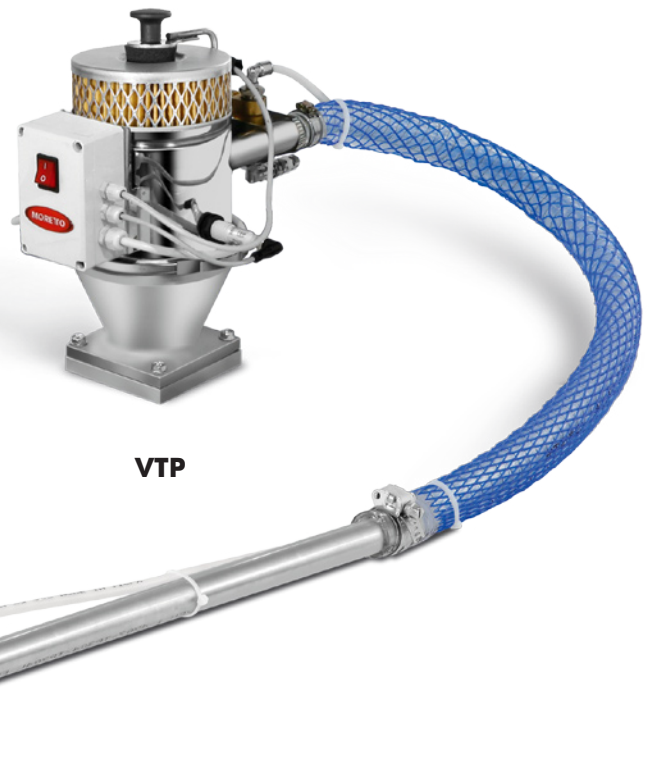

VTP

Technical features

Model	Capacity		Throughput *		Pipe diameter		Flange holes			Temperature	
	dmc	cft	kg/h	lb/h	Ø mm	Ø in	N.	Ø mm	Ø in	°C	°F
VTM 20	-	-	30	66,14	20	0,79	4	6,5	0,26	80	176
VTM 30	-	-	80	176,37	30	1,18	4	8,5	0,33	80	176
VTP 20	0,65	0,02	30	66,14	20	0,79	4	7	0,28	80	176
VTP 30	1,25	0,04	80	176,37	30	1,18	4	7	0,28	80	176

- Standard electrical supply: **230V/1ph/50Hz**


- Compressed air supply: **6 ÷ 8 bar / 87 ÷ 116 psi**

* Referring throughput with materials in granules (Bulk density = 0,65 kg/dmc / 1,43 lb/cft) - Length = 4 m / 13,1 ft; Height = 3 m / 9,8 ft.



VENTURI FEEDERS

VTM - VTP - SV

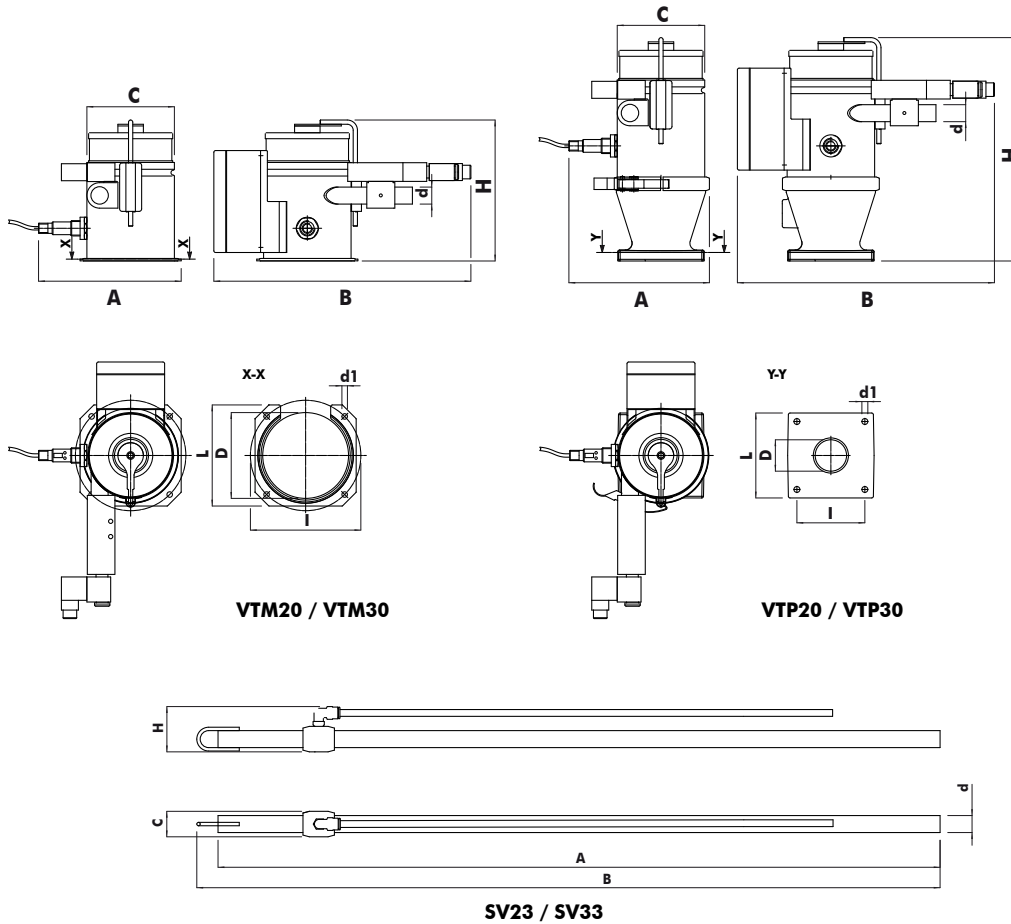

Dimensions

Model	A		B		H		C		d		L		D		I		d ₁		Weight	
	mm	in	mm	in	mm	in	mm	in	Ø mm	Ø in	Ø mm	Ø in	Ø mm	Ø in	Ø mm	Ø in	Ø mm	Ø in	kg	lb
VTM 20	168	6,61	303	11,93	166	6,54	103	4,06	20	0,79	119	4,69	101	3,98	130	5,12	4 x 6,5	4 x 0,26	2,1	4,63
VTM 30	230	9,06	300	11,81	177	6,97	147	5,79	30	1,18	165	6,50	145	5,71	180	7,09	4 x 8,5	4 x 0,33	3,2	7,05
VTP 20	165	6,50	303	11,93	263	10,35	103	4,06	20	0,79	100	3,94	37	1,46	80	3,15	4 x 7	4 x 0,28	2,2	4,85
VTP 30	226	8,90	300	11,81	292	11,50	147	5,79	30	1,18	120	4,72	50	1,97	100	3,94	4 x 7	4 x 0,28	3,8	8,38

Model	A		B		H		C		d		Weight	
	mm	in	mm	in	mm	in	mm	in	Ø mm	Ø in	kg	lb
SV 23 *	850	33,46	875	34,45	52	2,05	30	1,18	20	0,79	1,3	2,87
SV 33 *	850	33,46	890	35,04	63	2,48	40	1,57	30	1,18	1,9	4,19

* Suction probe kit supplied a part with a flexible hose having a length of 3 m / 9,8 ft.