



MINI DRYER SPYRO **XD 1 TS ÷ XD 5 TS**



Technical features

Model	Temperature		Air Flow		Hopper capacity		Heating		Total power		Energy average consumption		Phases
	°C	°F	Nmc/h	cft/min	dmc	cft	kW	HP	kW	HP	kW/h at 80°C	HP/h at 176°C	
XD 1 TS	180	356	1÷5	0,6÷2,9	6	0,21	0,4	0,54	0,45	0,60	0,021÷0,107	0,028÷0,143	1 ph
XD 2 TS	180	356	3÷10	1,7÷5,9	15	0,53	0,95	1,27	1	1,34	0,062÷0,206	0,083÷0,276	1 ph
XD 3 TS	180	356	6÷17	3,5÷10	30	1,06	0,95	1,27	1	1,34	0,121÷0,350	0,162÷0,469	1 ph
XD 4 TS	150	302	9÷30	5,3÷17,6	50	1,77	1,9	2,55	2	2,68	0,182÷0,606	0,244÷0,813	1 ph
XD 5 TS	150	302	9÷30	5,3÷17,6	75	2,65	1,9	2,55	2	2,68	0,182÷0,606	0,244÷0,813	1 ph






Standard power supply: **230V/1ph/50Hz.**



MINI DRYER SPYRO **XD 1 TS ÷ XD 5 TS**

XD 2 TS ÷ XD 5 TS

XD 1 TS

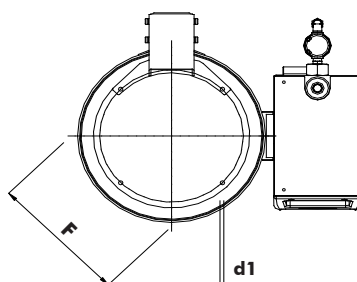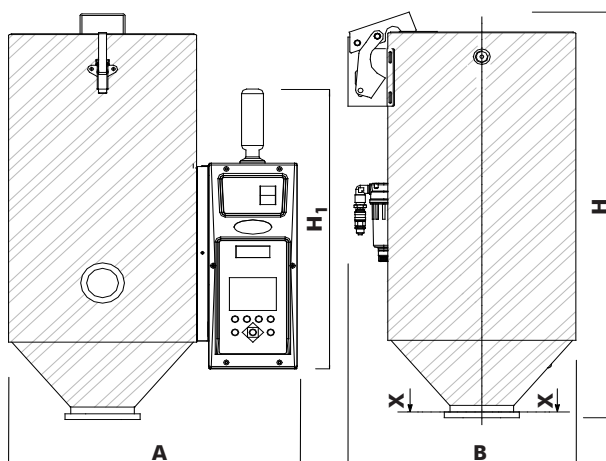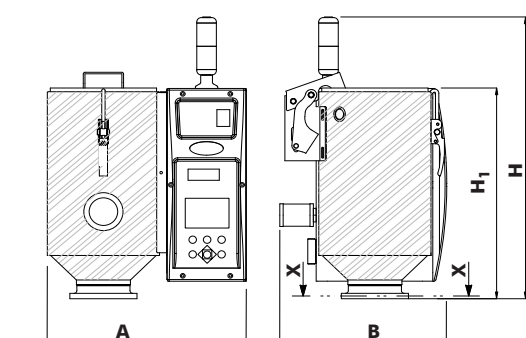

SEZ. X:X

Dimensions

Model	A		B		H		H ₁		d		D		F		d ₁	I		L		Weight	
	mm	in	mm	in	mm	in	mm	in	Ø mm	Ø in	Ø mm	Ø in	mm	in	Ø mm	mm	in	mm	in	kg	lb
XD 1 TS	356	14,0	334	13,1	521	20,5	389	15,3	9	0,35	50	2	130	5,1	4xM5	100x100	3,9x3,9	120x120	4,7x4,7	10	22
XD 2 TS	409	16,1	334	13,1	591	23,3	556	21,9	9	0,35	50	2	180	7,1	4xM6	100x100	3,9x3,9	120x120	4,7x4,7	13	28
XD 3 TS	455	17,9	370	14,6	705	27,8	670	26,4	9	0,35	50	2	230	9,1	4xM6	100x100	3,9x3,9	120x120	4,7x4,7	18	40
XD 4 TS	581	22,9	485	19,1	1064	41,9	1028	40,5	11	0,43	70	2,8	280	11,0	4 x 9	180x180	7,1x7,1	220x220	8,7x8,7	58,5	129
XD 5 TS	632	24,9	583	22,9	1141	44,9	1100	43,3	11	0,43	70	2,8	280	11,0	4 x 9	180x180	7,1x7,1	220x220	8,7x8,7	65	143