



MINI DRYER

XD 0 TX - XD 1 TX - XD 2 TX - XD 3 TX

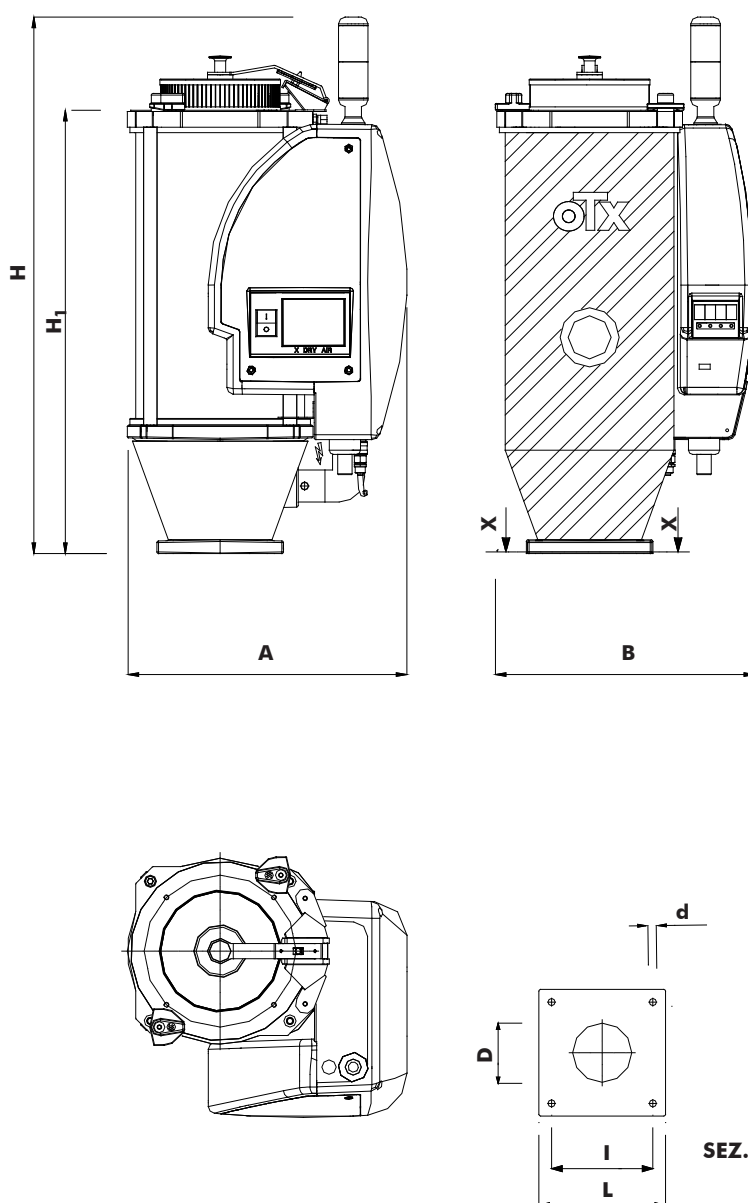


Technical features

Model	Temperature		Airflow		Hopper capacity				Total power		Energy average consumption	
	°C	°F	Nmc/h	cft/min	dmc	cft	kg *	lb *	kW	HP	kW/h at 80°C	HP/h at 176°F
XD 0 TX	20 ÷ 180	68 ÷ 356	0,5 ÷ 3,0	0,29 ÷ 1,77	1,5	0,05	0,72	1,5	0,45	0,60	0,010 ÷ 0,060	0,01 ÷ 0,08
XD 1 TX	20 ÷ 180	68 ÷ 356	2,0 ÷ 6,0	1,8 ÷ 3,53	4,0	0,14	2,4	5,24	0,45	0,60	0,040 ÷ 0,121	0,05 ÷ 0,16
XD 2 TX	20 ÷ 180	68 ÷ 356	3,0 ÷ 10,0	1,77 ÷ 5,89	12,0	0,42	7,2	15,73	1,05	1,41	0,062 ÷ 0,205	0,08 ÷ 0,27
XD 3 TX	20 ÷ 180	68 ÷ 356	6,0 ÷ 15,0	3,5 ÷ 8,8	24,0	0,84	15,6	34,10	1,00	1,34	0,062 ÷ 0,205	0,08 ÷ 0,27

Standard power supply: **230V/1ph/50Hz.**

* Bulk density 0,65 kg/dmc - 40,6 lb/cft

**MINI DRYER SKY****XD 0 TX - XD 1 TX - XD 2 TX - XD 3 TX****Dimensions**

Model	A		B		H		H1		D		I		L		d		Weight	
	mm	in	mm	in	mm	in	mm	in	mm	in	Ø mm	Ø in	mm	in	mm	in	kg	lb
XD 0 TX	230	9,1	213	8,4	301	11,9	478	18,8	37	1,46	80 x 80	3,15 x 3,15	100 x 100	3,94 x 3,94	6,5	0,26	7,6	16,8
XD 1 TX	276	10,9	268	10,6	438	17,2	548	21,6	50	1,97	100 x 100	3,94 x 3,94	120 x 120	4,72 x 4,72	8,5	0,33	14	30,8
XD 2 TX	331	13,0	307	12,1	525	20,7	635	25,0	70	2,75	120 x 120	4,72 x 4,72	150 x 150	5,91 x 5,91	8,5	0,33	24	52,8
XD 3 TX	420	16,5	399	15,7	805	31,7	745	29,3	70	2,75	120 x 120	4,72 x 4,72	150 x 150	5,91 x 5,91	9	0,35	28,5	63