



Listening

PLASTICS AUTOMATION

**MORETTO**

## REFRIGERATORI SERIE MINI MINI SERIES CHILLERS

### RC 6÷30



### Caratteristiche tecniche - Technical specifications

Modello Model	*Pot. frigorifera Cooling power		*Pot. risc Heating P.	*Pot. compressore Compressor power	Ventilatore Fan		Pompa centrifuga Centrifugal pump			Serbatoio Tank	Fasi Phases
	kW	kcal/h	kW	kW	kW	m <sup>3</sup> /h	kW	l/min	bar	dm <sup>3</sup>	ph
<b>RC 6</b>	6,8	5850	8,0	1,2	0,2	4100	0,5	10÷50	4,6÷0,8	50	3
<b>RC 10</b>	10,6	9120	12,7	2,1	0,2	4000	0,5	10÷50	4,6÷0,8	50	3
<b>RC 15</b>	15,1	13030	18,6	3,5	0,8	8300	0,75	30÷100	3,0÷2,4	100	3
<b>RC 20</b>	19,2	16500	23,1	3,9	0,8	8000	0,75	30÷100	3,0÷2,4	100	3
<b>RC 30</b>	26,2	22530	32,7	6,5	0,8	7800	1,85	50÷210	4,2÷2,5	100	3

Alimentazione standard / Standard power supply: **400V/3ph/50Hz.**

\* Temp. ambiente = 25°C / ambient Temp. = 25°C; Temp. acqua = 15°C / Water Temp. = 15°C; Gas R407C




Listening

PLASTICS AUTOMATION

**MORETTO**

# REFRIGERATORI SERIE MINI MINI SERIES CHILLERS RC 6÷30

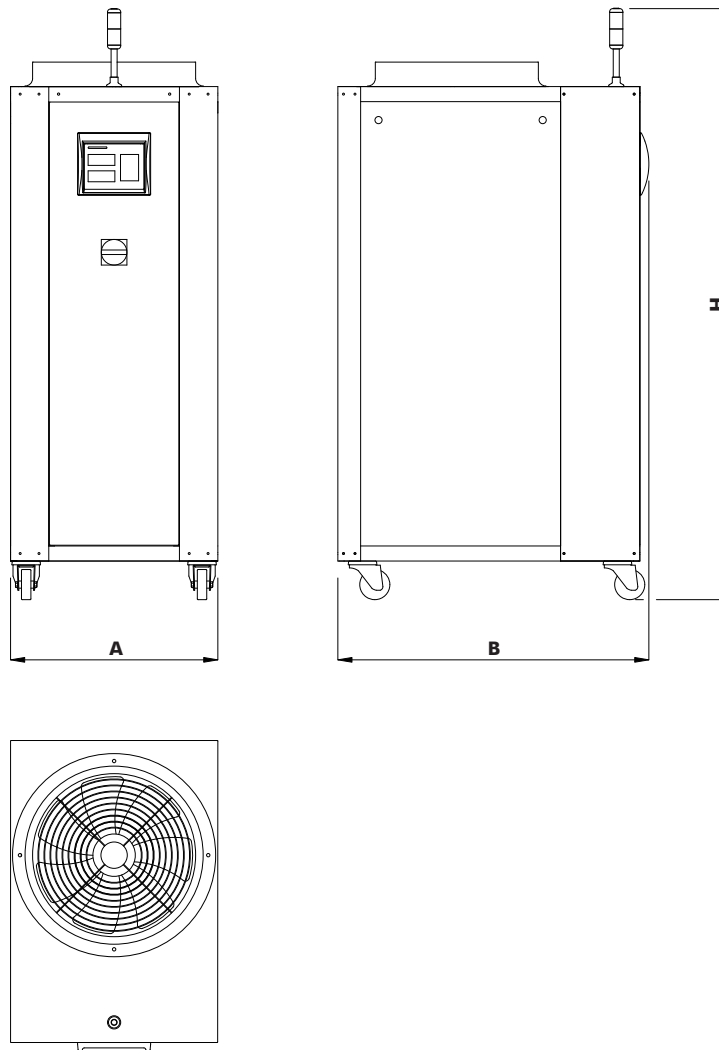

## Dimensioni - Dimensions

Modello Model	A	B	H	Collegam. idraulici Water connections	Peso* Weight
	mm	mm	mm	Ø [pollici / inches]	kg
<b>RC 6</b>	562	826	1570	1"	156
<b>RC 10</b>	562	826	1570	1"	165
<b>RC 15</b>	650	936	1830	1"	220
<b>RC 20</b>	650	936	1830	1"	240
<b>RC 30</b>	650	936	1830	1"	280

\* Escluso acqua di circuito / Circuit water not included